



Rope Drop Installation


1. Mount awning rail where top edge of drop is to be.




2. Mount pulleys loosely above awning rail (using screw, washer, and pulley), approximately 12 inches from edges of awning rail. Pulley should be able to turn sideways.

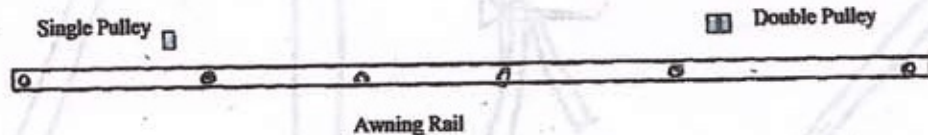


3. Wrap rope around screw under awning rail and feed through pulleys as shown. Wrap rope around other screw under awning rail, then tighten screws.

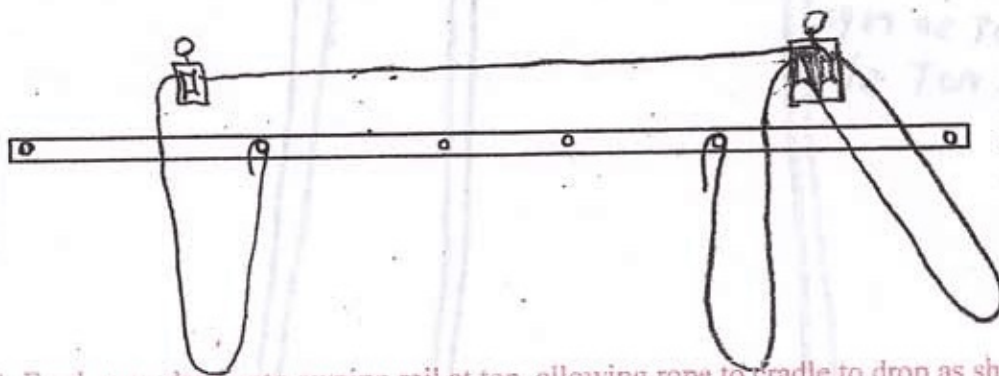

4. Feed rope drop onto awning rail at top, allowing rope to cradle to drop as shown.

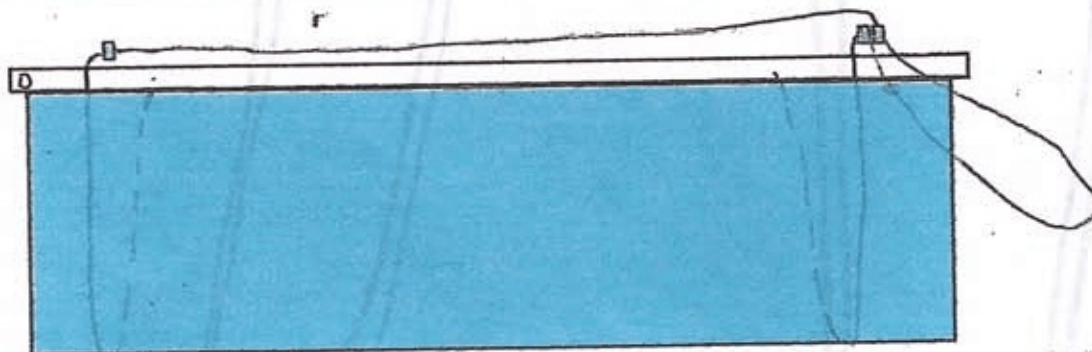


5. Mount the cleat at a convenient level for tie-off, on double pulley side.



Cleat >

✓ Rope Drop Checklist ✓

1 Fabric Drop	<input type="checkbox"/>	1 Cleat + 2 screws	<input type="checkbox"/>
Awning Rail + screws	<input type="checkbox"/>	2 bungies for tie down	<input type="checkbox"/>
Rope	<input type="checkbox"/>	2 screw eyes	<input type="checkbox"/>
1 Single, 1 Double Pulley, 2 hanger bolts, 4 washers, 4 nuts,	<input type="checkbox"/>	Instructions and Invoice	<input type="checkbox"/>

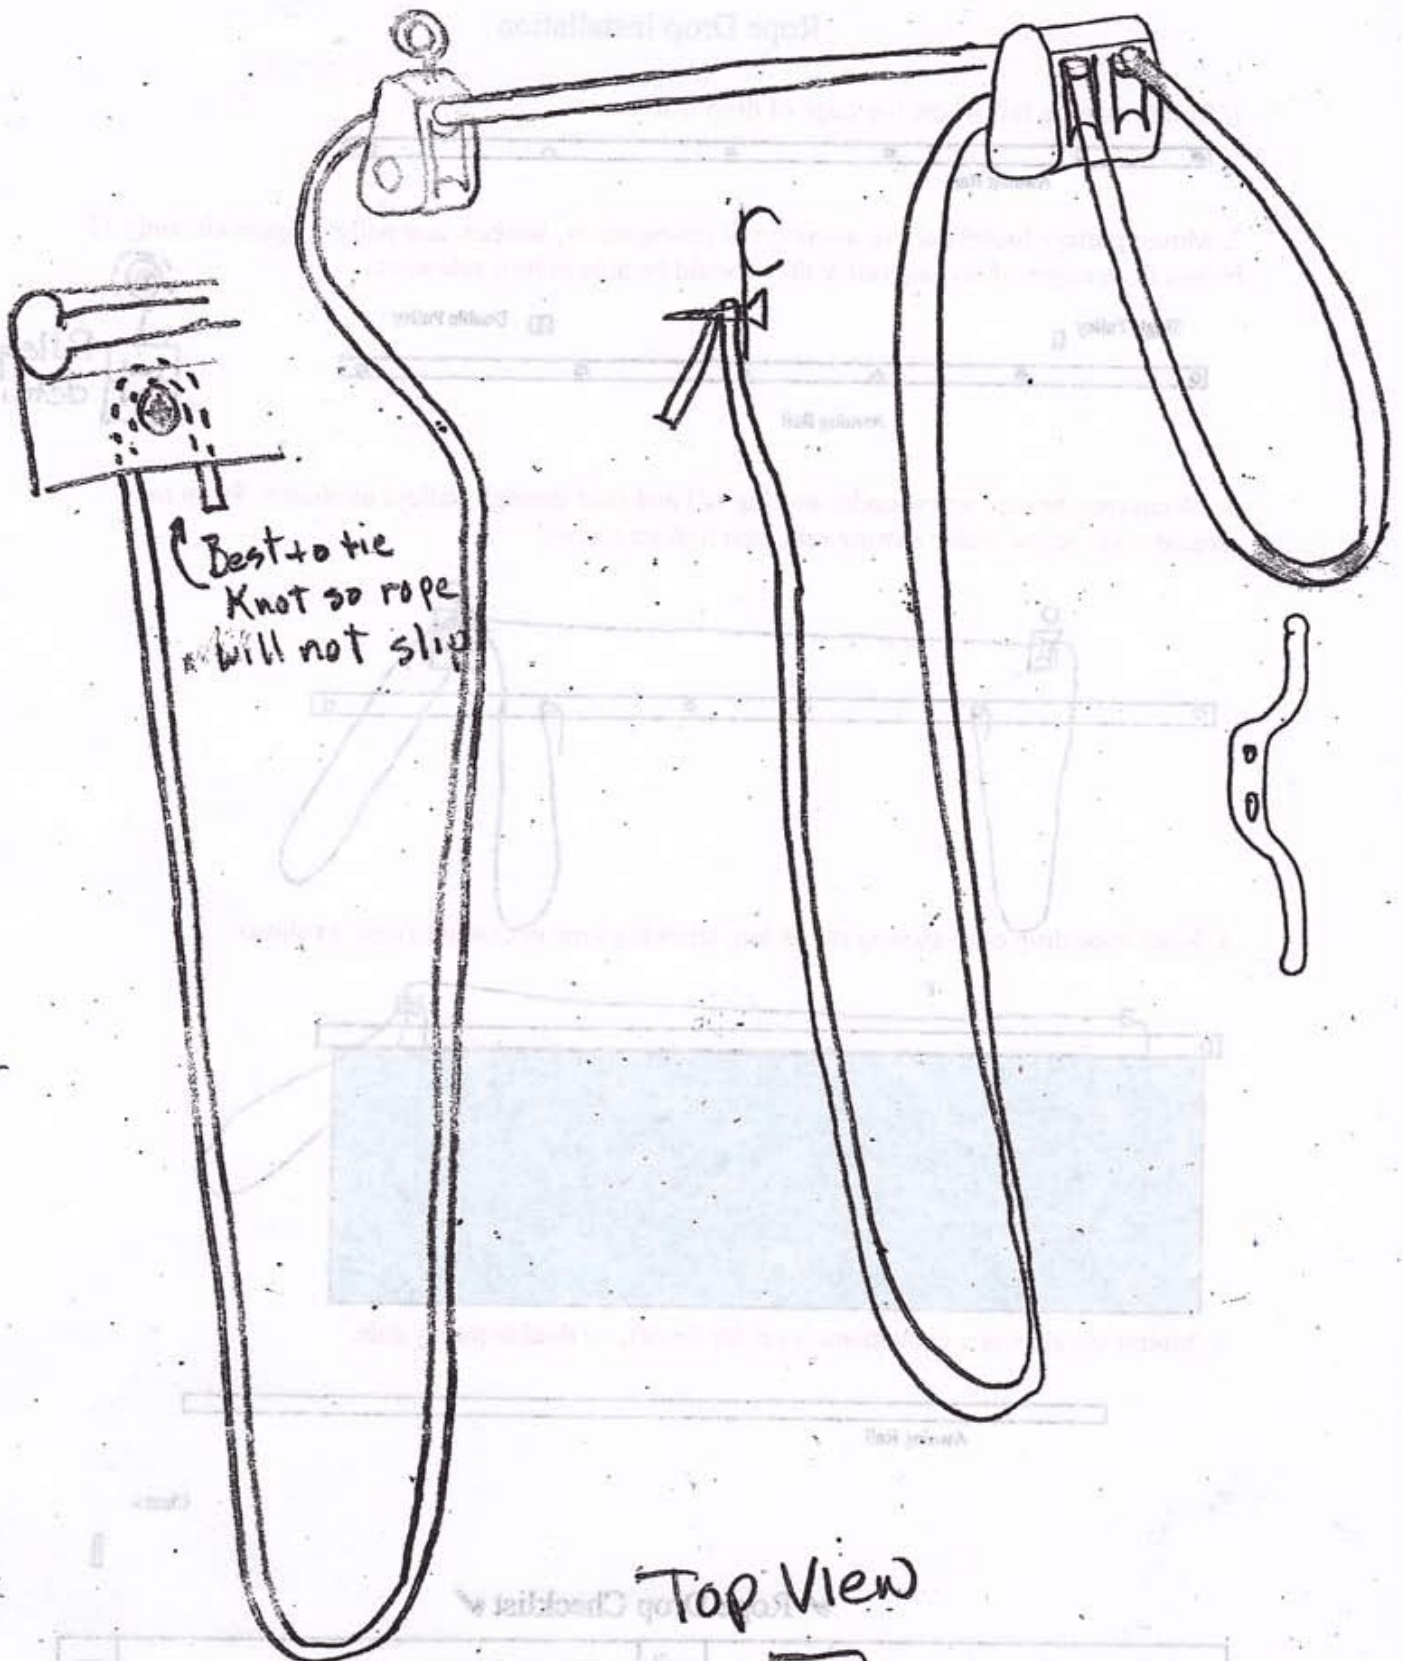

Top View

